

AUTOMOTIVE PRODUCTS CATALOGUE

GUANGDONG PUSTAR ADHESIVES&SEALANTS CO.,LTD.

GUANGDONG PUSTAR ADHESIVES&SEALANTS CO.,LTD.

Dongfeng east road, Qingxi town, Dongguan city, Guangdong province, China

Tel: +86-769-87840815

E-mail: pu@pustar.com

Web: www.pustar.com



COMPANY PROFILE





Guangdong Pustar Adhesives & Sealants Co.,Ltd. was founded in 2003 in Dongguan city, Guangdong province, which is a high-tech enterprise specialized in polyurethane sealant and related modified products researching, manufacturing and marketing. To keep up with growing market requirements, Pustar optimized and upsized its automatic production line in 2006 and 2013, and became the domestic polyurethane manufacturer with annual output of 50000 tons. After years of production technology optimization and innovation, Pustar gradually achieve automated production and have core independent intellectual property rights, and has become one of the largest polyurethane sealant manufacturer in China.

Pustar products are mainly used in the industrial sector, such as in the automotive, machinery, shipbuilding and construction sectors, such as tunnels, airports and highways, and are also widely used in the field of house decoration, electronics and furniture. Moreover, it is popular in domestic and foreign markets such as the United States, Asia, Africa and some EU countries.




Leading R&D Ability- Lab

More than 3000 square meter
Guangdong polyurethane
adhesives and sealant R&D
center

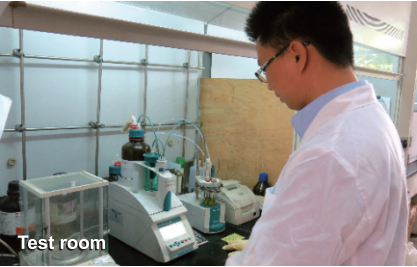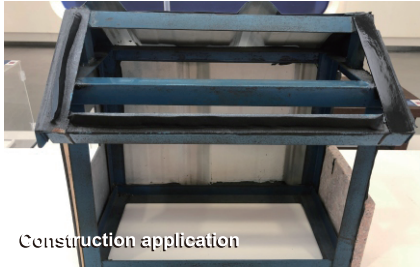

Instrument & Equipment- Precision Imported Instruments and Equipment.

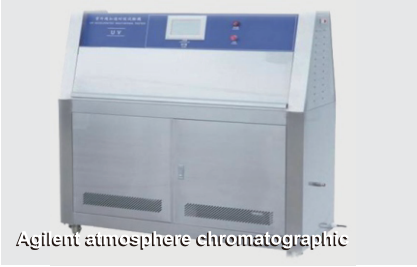

As professional customer service teams. we are committed to offer personalized technology and service.



We do compatibility test between products and target substrates to ensure the performance of products can meet clients' requirement.

We provide our client with training on application and guidance for construction convenience.



We also supply matching products like activator wiper, scrub wet tissues, and related tools.

FMVSS 212 Crash Test

2008 BMW 335iA FMVSS 212
Flat Frontal Barrier
TRC Inc. Test Number: 170414

Prepared by:
Transportation Research Center Inc.
10820 State Route 347
P. O. Box B-67
East Liberty, OH 43319



April 2017
Final Report


Prepared for:
Pustar RENZ Adhesives
Dongfeng, East Road,
Qingxi Town, Dongguan,
Guangdong, China 523651



Front view of windshield

Details of windshield mounting such as retention method, trim type, etc.:			
Trim Type:		Plastic	
Mounting Method:		Adhesive, windshield installed at 12:21 pm, 3 hour cure time	
FMVSS 212 requirements:			
The post-test periphery retention amount must be at least 75% of the pre-test periphery measurement for vehicles NOT equipped with automatic restraints, and 50% for each side of windshield for vehicles equipped with automatic restraint systems for front occupants.			
Windshield periphery measurements:			
	Pre-test	Post-test	Percent retention
Right side (mm):	2035	2035	100.0
Left side (mm):	2035	2035	100.0
Total (mm):	4070	4070	100.0
Loss of windshield retention lengths:			
A (mm)	B (mm)	C (mm)	Total (mm)
0	0	0	0
Pre-test windshield mounting material temperature:		22.8°C	73.1°F


Figure 2 FMVSS 212 Test Data

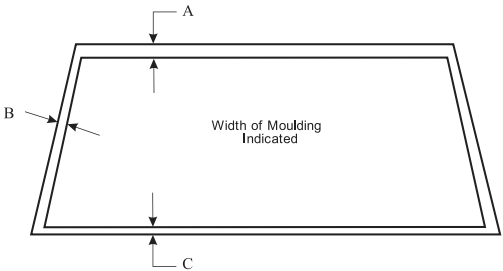

Project: 20160726
April 21, 2017

170414
TRC

Automotive application	01
5758	02
Renz 10A	03
Renz 10	04
Renz 11	05
Renz 12	06
Renz 20	07
Renz 30A	08
Renz 30B	09
Renz 30C	10
Renz 30D	11
Renz 13	12
Renz 40B	13
Renz 40G	14
Renz 40W	15
Renz 41	16
Renz 42	17
1001 Accessories	18
1002A Primer	19
Applicators	20
Marketing & Partners	21

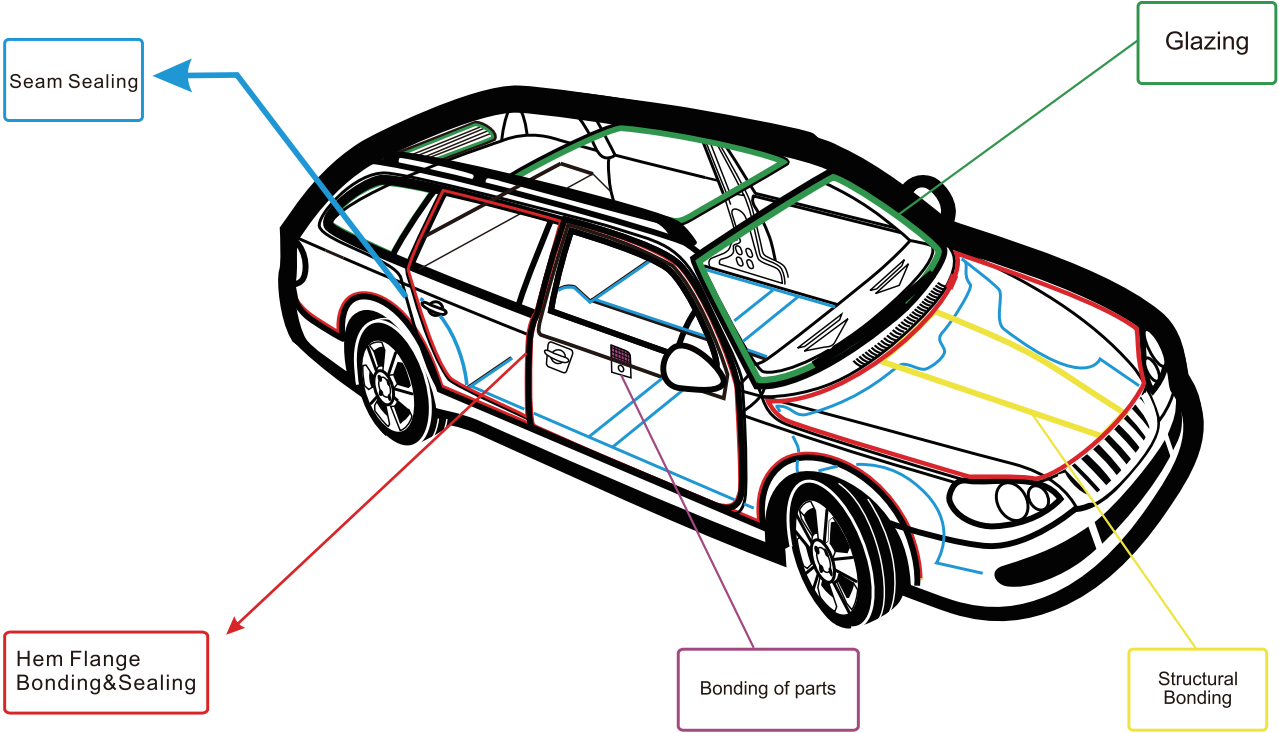

Product description

5758 is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- Excellent softness after curing, easy to cut, convenient for replacement.
- Excellent bonding performance, primer-less.
- Excellent extrudability and thixotropy, non- sag.

Areas of application

Suitable for windshield and side & back window glass bonding.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml



Technical data^①

5758	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	25, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	97, approx.
Shore A-hardness GB/T 531.1	60, approx.
Tensile strength(MPa) GB/T 528	6.0, approx.
Elongation at break(%) GB/T 528	400 approx.
Tear strength(N/mm) GB/T 529	8.0, approx.
Tensile-shear strength(MPa) GB/T 7124	2.5 approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz10A is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application etc.

Product features

- Excellent bonding performance, primer-less.
- Excellent extrudability and thixotropy, non-sag.

Areas of application

Suitable for windshield and side & back window glass bonding.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml



Technical data^①

Renz10A	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	20, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	95, approx.
Shore A-hardness GB/T 531.1	60, approx.
Tensile strength(MPa) GB/T 528	3.5, approx.
Elongation at break(%) GB/T 528	350 approx.
Tear strength(N/mm) GB/T 529	6.0, approx.
Tensile-shear strength(MPa) GB/T 7124	1.5 approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz10 is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- Excellent softness after curing, easy to cut, convenient for replacement.
- Excellent bonding performance, primer-less.
- Excellent extrudability and thixotropy, non- sag.

Areas of application

Suitable for windshield and side & back window glass bonding.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml
- Pail 240kg

Technical data^①

Renz10	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	25, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	97, approx.
Shore A-hardness GB/T 531.1	60, approx.
Tensile strength(MPa) GB/T 528	5.0, approx.
Elongation at break(%) GB/T 528	400 approx.
Tear strength(N/mm) GB/T 529	8.0, approx.
Tensile-shear strength(MPa) GB/T 7124	2.5 approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz11 is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- Environment friendly, solvent-free.
- Excellent bonding and sealing, primer-less.
- Excellent softness after curing, easy to cut, convenient for replacement.

Areas of application

Suitable for windshield and side & back window glass bonding.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml
- Pail 240kg

Technical data^①

Renz11	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	30, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	99, approx.
Shore A-hardness GB/T 531.1	55, approx.
Tensile strength(MPa) GB/T 528	5.0, approx.
Elongation at break(%) GB/T 528	400 approx.
Tear strength(N/mm) GB/T 529	8.0, approx.
Tensile-shear strength(MPa) GB/T 7124	2.5 approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz12 is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- No DOP and solvent, comply with EU laws and regulations.
- Excellent softness after curing, easy to cut, convenient for replacement.
- Excellent bonding performance, primer-less.

Areas of application

Suitable for windshield and side & back window glass bonding.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml
- Pail 240kg



Technical data^①

Renz12	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	30, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	99, approx.
Shore A-hardness GB/T 531.1	55, approx.
Tensile strength(MPa) GB/T 528	5.0, approx.
Elongation at break(%) GB/T 528	400 approx.
Tear strength(N/mm) GB/T 529	8.0, approx.
Tensile-shear strength(MPa) GB/T 7124	2.5 approx.
Operating temperature(°C)	-40~90

① All data above were tested under standardized condition at 23±2°C, 50±5%RH.
② Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz20 is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- Environment friendly, solvent-free, medium viscosity.
- Excellent bonding performance, primer-less.

Areas of application

Suitable for windshield and side & back window glass bonding.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml
- Pail 240kg



Technical data^①

Renz20	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	25, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	99, approx.
Shore A-hardness GB/T 531.1	60, approx.
Tensile strength(MPa) GB/T 528	6.5, approx.
Elongation at break(%) GB/T 528	400 approx.
Tear strength(N/mm) GB/T 529	8.0, approx.
Tensile-shear strength(MPa) GB/T 7124	4.0 approx.
Operating temperature(°C)	-40~90

① All data above were tested under standardized condition at 23±2°C, 50±5%RH.
② Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz30A is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- High viscosity, excellent initial bonding strength, quickly immobilize the windshield.
- High strength and elasticity.
- Excellent bonding performance, primer-less.

Areas of application

Suitable for windshield, side & back window glass bonding.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml
- Pail 240kg

Technical data^①

Renz30A	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	25, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	97, approx.
Shore A-hardness GB/T 531.1	60, approx.
Tensile strength(MPa) GB/T 528	6.5, approx.
Elongation at break(%) GB/T 528	400, approx.
Tear strength(N/mm) GB/T 529	8.0, approx.
Tensile-shear strength(MPa) GB/T 7124	4.0, approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz30B is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- 2 hours. safe drive away time
- Excellent thixotropy, no sagging, high viscosity.
- Environment friendly, solvent-free.
- High viscosity

Areas of application

Suitable for windshield and side & back window glass bonding.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml
- Pail 240kg

Technical data^①

Renz30B	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	15, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	98, approx.
Shore A-hardness GB/T 531.1	60, approx.
Tensile strength(MPa) GB/T 528	8.0, approx.
Elongation at break(%) GB/T 528	350, approx.
Tear strength(N/mm) GB/T 529	10.0, approx.
Tensile-shear strength(MPa) GB/T 7124	4.5, approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz30C is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- High strength, excellent elasticity.
- Environment friendly, solvent-free.
- Excellent thixotropy, no sagging.

Areas of application

Suitable for windshield, side & back window glass bonding.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml
- Pail 240kg

Technical data^①

Renz30C	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	50, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	99, approx.
Shore A-hardness GB/T 531.1	60, approx.
Tensile strength(MPa) GB/T 528	8.5, approx.
Elongation at break(%) GB/T 528	400, approx.
Tear strength(N/mm) GB/T 529	12.0, approx.
Tensile-shear strength(MPa) GB/T 7124	5.0, approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C、50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz30D is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- Excellent bonding performance, primer-less.
- High strength with good extrudability.
- Excellent thixotropy, non-sagging.
- High strength,excellent elasticity.

Areas of application

Suitable for windshield and side& back window glass bonding.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml
- Pail 240kg

Technical data^①

Renz30D	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	60, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	98, approx.
Shore A-hardness GB/T 531.1	50, approx.
Tensile strength(MPa) GB/T 528	8.5, approx.
Elongation at break(%) GB/T 528	450, approx.
Tear strength(N/mm) GB/T 529	10.0, approx.
Tensile-shear strength(MPa) GB/T 7124	4.5, approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C、50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz13 is one-component silane modified polyether sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- Excellent bonding performance, primerless.
- Environment friendly, solvent-free.
- High strength and elasticity.

Areas of application

Suitable for windshield, side & back window glass bonding and sealing.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml

Technical data^①

Renz13		
Items	Scope	Typical value
Appearance	Black homogeneous paste	/
Extrudability(ml/min) GB/T 13477.4	≥30	50
Sagging properties(mm) GB/T 13477.6	0	0
Tack free time ^② (min) GB/T 13477.5	10~30	20
Curing speed(mm/d) HG/T 4363	≥3.0	3.5
Non-volatile contents (%) GB/T 2793	≥97	98
Shore A-hardness GB/T 531.1	50~60	53
Tensile strength(MPa) GB/T 528	≥3.0	3.5
Elongation at break(%) GB/T 528	≥300	400
Tear strength(N/mm) GB/T 529	≥6.0	8.0
Tensile-shear strength(MPa) GB/T 7124	≥2.5	2.6
Operating temperature(°C)	-40~90	

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.



Product description

Renz40B is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- One-component, excellent thixotropy, easy for application.
- Excellent sealing performance with metal, glass and a wide range of paints.
- Excellent sealing and cohesion performance, flexible and durable in sealing.

Areas of application

Suitable for sealing between side glass and main parts of automobile, railway buses and ships. Sealing for automotive skin leather and aluminum gusset. Sealing for inner and exterior decorations.


Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml

Technical data^①

Renz40B	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	50, approx.
Curing speed(mm/d) HG/T 4363	3.2, approx.
Non-volatile contents (%) GB/T 2793	97, approx.
Shore A-hardness GB/T 531.1	55, approx.
Tensile strength(MPa) GB/T 528	4.5, approx.
Elongation at break(%) GB/T 528	400, approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz40G is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- Excellent extrudability and thixotropy, easy to smooth and decorate the gap.
- Surface can be polished and painted.

Areas of application

Suitable for sealing the joint of car body panels, weld joint, roof, machine, air cooler and so on.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml

Technical data^①

Renz40G	
Items	Properties
Appearance	Grey homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	40, approx.
Curing speed(mm/d) HG/T 4363	2.8, approx.
Non-volatile contents (%) GB/T 2793	97, approx.
Shore A-hardness GB/T 531.1	45, approx.
Tensile strength(MPa) GB/T 528	2.0, approx.
Elongation at break(%) GB/T 528	450, approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz40W is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- Excellent extrudability and thixotropy, easy to smooth and decorate the gap.
- Surface can be polished and painted.

Areas of application

Suitable for sealing the joint of car body panels, weld joint, roof, machine, air cooler and so on.


Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml

Technical data^①

Renz40W	
Items	Properties
Appearance	White homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	40, approx.
Curing speed(mm/d) HG/T 4363	2.8, approx.
Non-volatile contents (%) GB/T 2793	97, approx.
Shore A-hardness GB/T 531.1	45, approx.
Tensile strength(MPa) GB/T 528	2.0, approx.
Elongation at break(%) GB/T 528	450, approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz41 is one-component moisture curable polyurethane sealant. It has excellent bonding and sealing performance. No corrosion and pollution to substrates, environment friendly, no bubbles during application, smooth and fine appearance etc.

Product features

- Excellent UV resistance performance.
- Environment friendly, solvent-free.
- Excellent extrudability and thixotropy.

Areas of application

Suitable for sealing car body outside panels and aluminum buckle.
Used for automotive interior decorative parts bonding and sealing.

Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml

Technical data^①

Renz41	
Items	Properties
Appearance	Black homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	50, approx.
Curing speed(mm/d) HG/T 4363	2.8, approx.
Non-volatile contents (%) GB/T 2793	99, approx.
Shore A-hardness GB/T 531.1	45, approx.
Tensile strength(MPa) GB/T 528	2.0, approx.
Elongation at break(%) GB/T 528	400 approx.
Tear strength(N/mm) GB/T 529	6.0, approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



Product description

Renz42 is one-component sealant, which based on silane modified polyurethane resin as main component. Good flexible and bonding performance with cement, tile, stone, and metal substrates etc.

Product features

- Environment friendly.
- Good weather-resistance, non-yellowing.
- Bonds well with many substrates.

Areas of application

Suitable for sealing the joint of car body panels, weld joint, roof, machine, air cooler and so on


Packing specification

- Cartridge 310ml
- Sausage 400ml
- Sausage 600ml

Technical data^①

Renz42	
Items	Properties
Appearance	White homogeneous paste
Sagging properties(mm) GB/T 13477.6	0
Tack free time ^② (min) GB/T 13477.5	70, approx.
Curing speed(mm/d) HG/T 4363	2.8, approx.
Non-volatile contents (%) GB/T 2793	99, approx.
Shore A-hardness GB/T 531.1	45, approx.
Tensile strength(MPa) GB/T 528	2.0, approx.
Elongation at break(%) GB/T 528	400 approx.
Operating temperature(°C)	-40~90

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



1001 Activator

Product description

1001 is one-component, colorless transparent liquid. Suitable for glass with black ceramic border and painted frame's cleaning and activate, improve to adhesive between primer or sealant and substrates.

Product features

- No odour, no pollution to substrates, no harmful volatile contents.
- Long active time, excellent activation to substrates, good effect on adhesion improving.

Areas of application

Suitable for between glass with black ceramic border and painted frame's cleaning and activate, improve to adhesive between primer or sealant and substrates.

Packing specification

- Can 5ml
- Can 10ml
- Can 50ml
- Can 250ml

Technical data^①

1001	
Items	Properties
Appearance	colorless transparent
Tack free time ^② (min) GB/T 13477.5	2, approx.
Effective constituent % GB/T 5174	5, approx.
Density g/cm3 GB/T 13447.2	0.8, approx.
Application temperature°C	5~35

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.



1002A Primer

Product description

1002A is one-component, black liquid. Suitable for between glass with black ceramic border and painted frame's bonding for precoat, improve to sealant bonding for substrates.

Product features

- Film dispersed uniformly, good hiding.
- Fast tack free time, good adhesion to various inert materials.
- Resistant to high temperature and water, good durability in harsh environment such as high temperature and humidity.

Areas of application

Suitable for between glass with black ceramic border and painted frame's bonding for precoat, improve to sealant bonding for substrates.

Packing specification

- Can 5ml
- Can 10ml
- Can 50ml
- Can 100ml
- Can 250ml
- Can 1000ml

Technical data^①

1002A	
Items	Properties
Appearance	Satin black homogeneous liquid
Tack free time ^② (min) GB/T 13477.5	2, approx.
Solid content % JC/T 408	30, approx.
Density g/cm3 GB/T 13447.2	0.9, approx.
Application temperature°C	5~35

①All data above were tested under standardized condition at 23±2°C, 50±5%RH.
②Value of tack free time would be affected by change of environmental temperature and humidity.




Applicators

Electric sealant gun



Electric sealant gun set

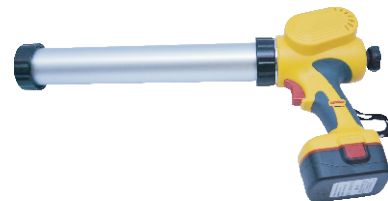

600ml Sealant Gun



310ml Sealant Gun

Pneumatic sealant gun



310ml Sealant Gun



600ml Sealant Gun

Manual sealant gun



310ml Sealant Gun



600ml Sealant Gun

Tools



Dauber



Steel wire

Marketing

Marketing Capacity - Marketing Network



Partners

